

Designs for Scale

How to deal with large numbers (millions) of entities in a system?

- ❑ IP devices in the internet (0.5 billion)
- ❑ Users in P2P network (millions)

More generally:

- ❑ Are there advantages to large scale?
- ❑ “For every type of animal there is a most convenient size, and a large change in size *inevitably* carries with it a change of form.”

True for networks?

Dealing with scale: Hierarchical routing

Scale: > 500 million destinations:

- ❑ Can't store all dest's in routing tables!
- ❑ Routing table exchange would swamp links!

Administrative autonomy

- ❑ internet = network of networks
- ❑ Each network admin may want to control routing in its own network


Hierarchical routing

- ❑ Aggregate routers into regions, “**autonomous systems**” (AS)
- ❑ Routers in same AS run same routing protocol
 - “**Intra-AS**” routing protocol
 - Routers in different AS can run different intra-AS routing protocol

Gateway routers

- ❑ Special routers in AS
- ❑ Run intra-AS routing protocol with all other routers in AS
- ❑ *Also* responsible for routing to destinations outside AS
 - Run ***inter-AS routing*** protocol with other gateway routers


Intra-AS and inter-AS routing

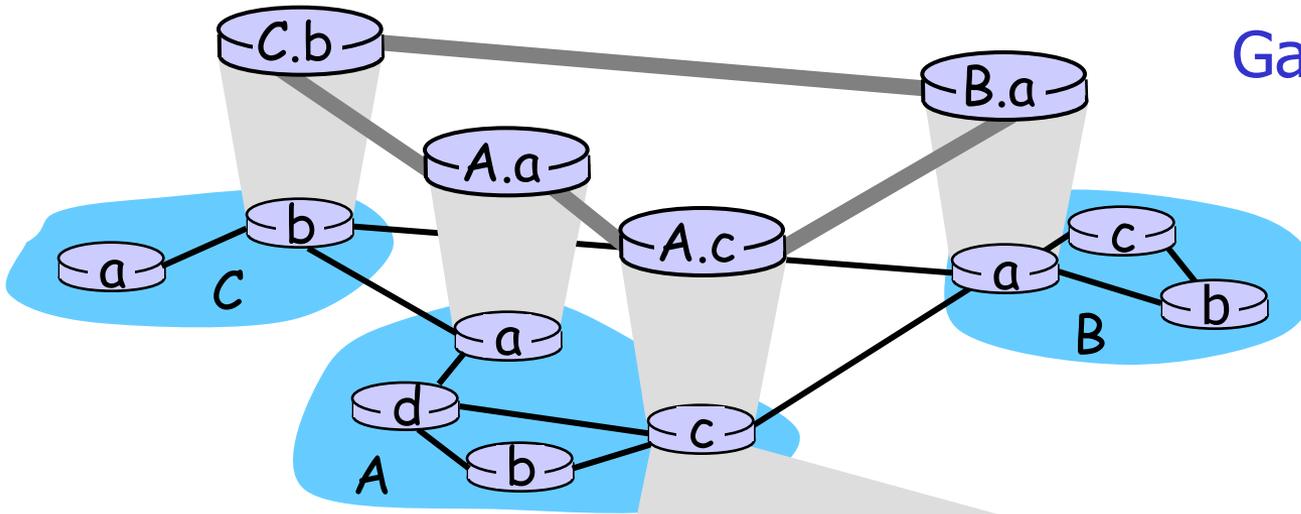


Gateways:

- Perform inter-AS routing amongst themselves
- Perform intra-AS routing with other routers in their AS

inter-AS, intra-AS routing in gateway A.c

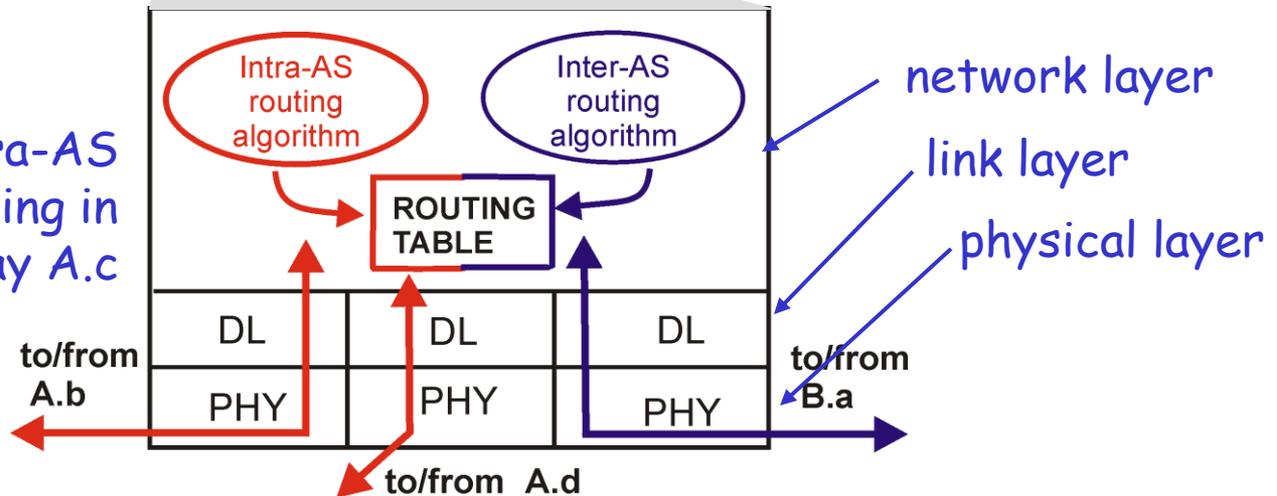

Intra-AS and inter-AS routing (2)

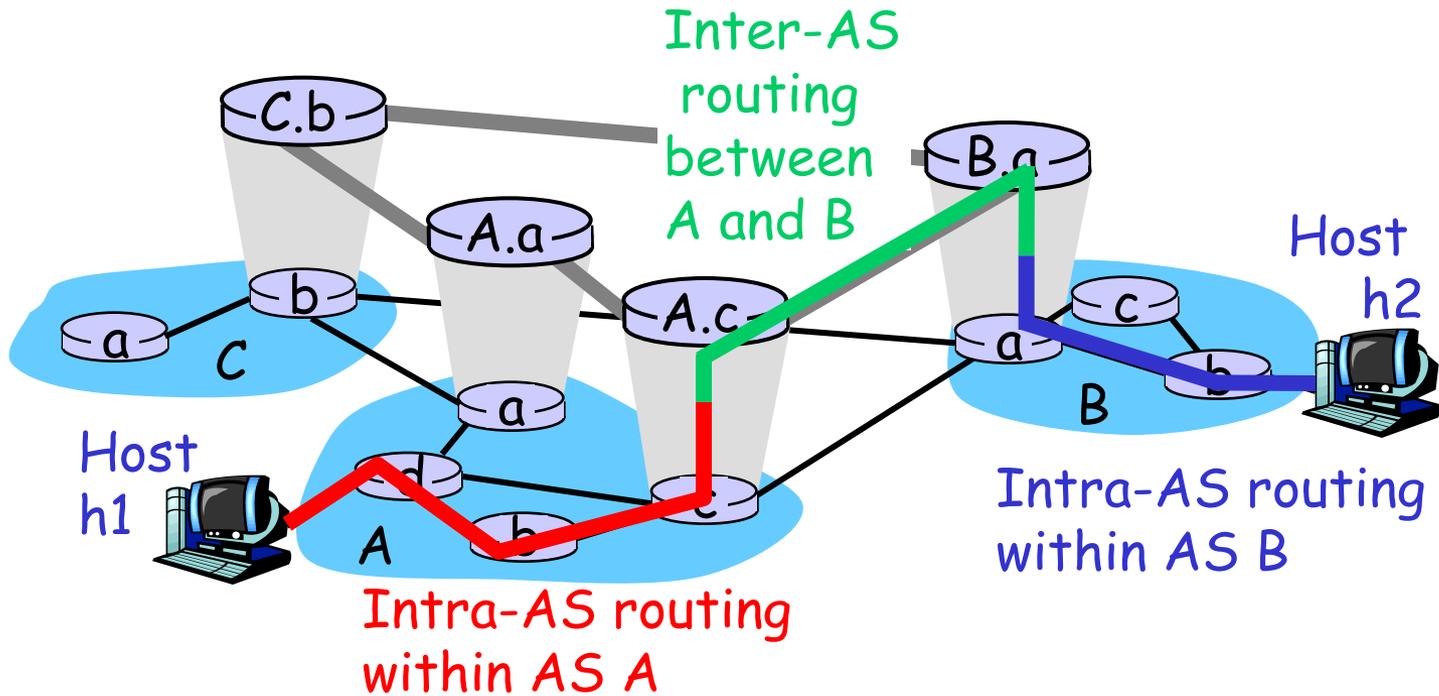

Dealing with scale: Addressing

Old-fashioned "class-full" addressing:

class

A	0	network		host		1.0.0.0 to 127.255.255.255
B	10		network		host	128.0.0.0 to 191.255.255.255
C	110		network		host	192.0.0.0 to 223.255.255.255
D	1110		multicast address			224.0.0.0 to 239.255.255.255

← 32 bits →


IP addressing: CIDR

□ Classful addressing:

- Inefficient use of address space, address space exhaustion
- E.g., class B net allocated enough addresses for 65K hosts, even if only 2K hosts in that network

□ CIDR: Classless InterDomain Routing

- Network portion of address of arbitrary length
- Address format: **a.b.c.d/x**, where x is # bits in network portion of address

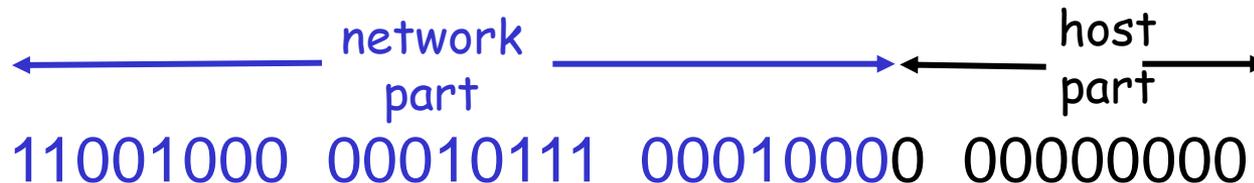

200.23.16.0/23

IP addresses: How to get one?


Q: How does *network* get network part of IP addr?

A: Gets allocated portion of its provider ISP's address space

ISP's block	<u>11001000</u>	<u>00010111</u>	<u>00010000</u>	00000000	200.23.16.0/20
Organization 0	<u>11001000</u>	<u>00010111</u>	<u>00010000</u>	00000000	200.23.16.0/23
Organization 1	<u>11001000</u>	<u>00010111</u>	<u>00010010</u>	00000000	200.23.18.0/23
Organization 2	<u>11001000</u>	<u>00010111</u>	<u>00010100</u>	00000000	200.23.20.0/23
...
Organization 7	<u>11001000</u>	<u>00010111</u>	<u>00011110</u>	00000000	200.23.30.0/23


Hierarchical addr: Route aggregation

Hierarchical addressing allows efficient advertisement of routing information:

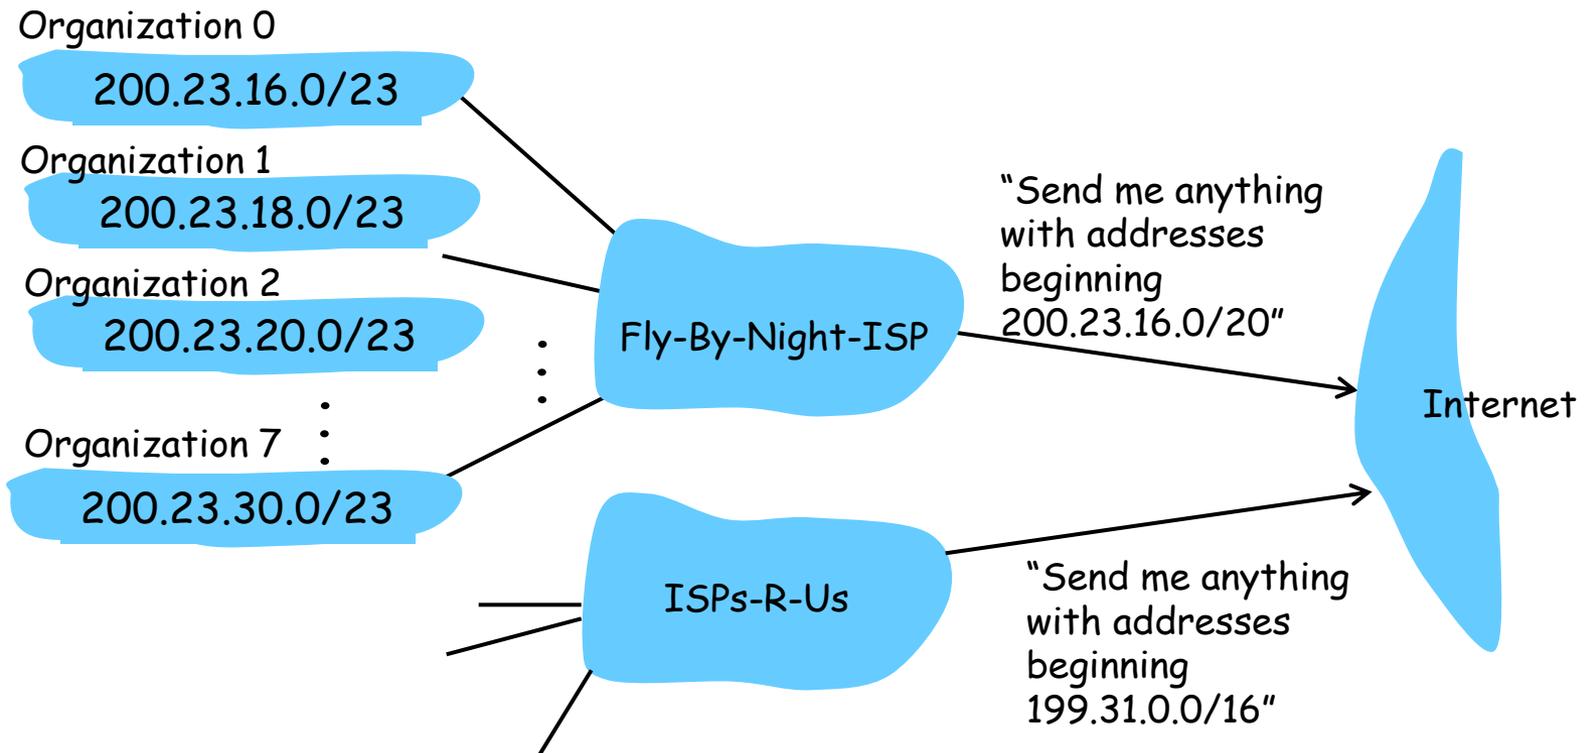


Hierarchical addr: Route aggregation

ISPs-R-Us has a more specific route to Organization 1

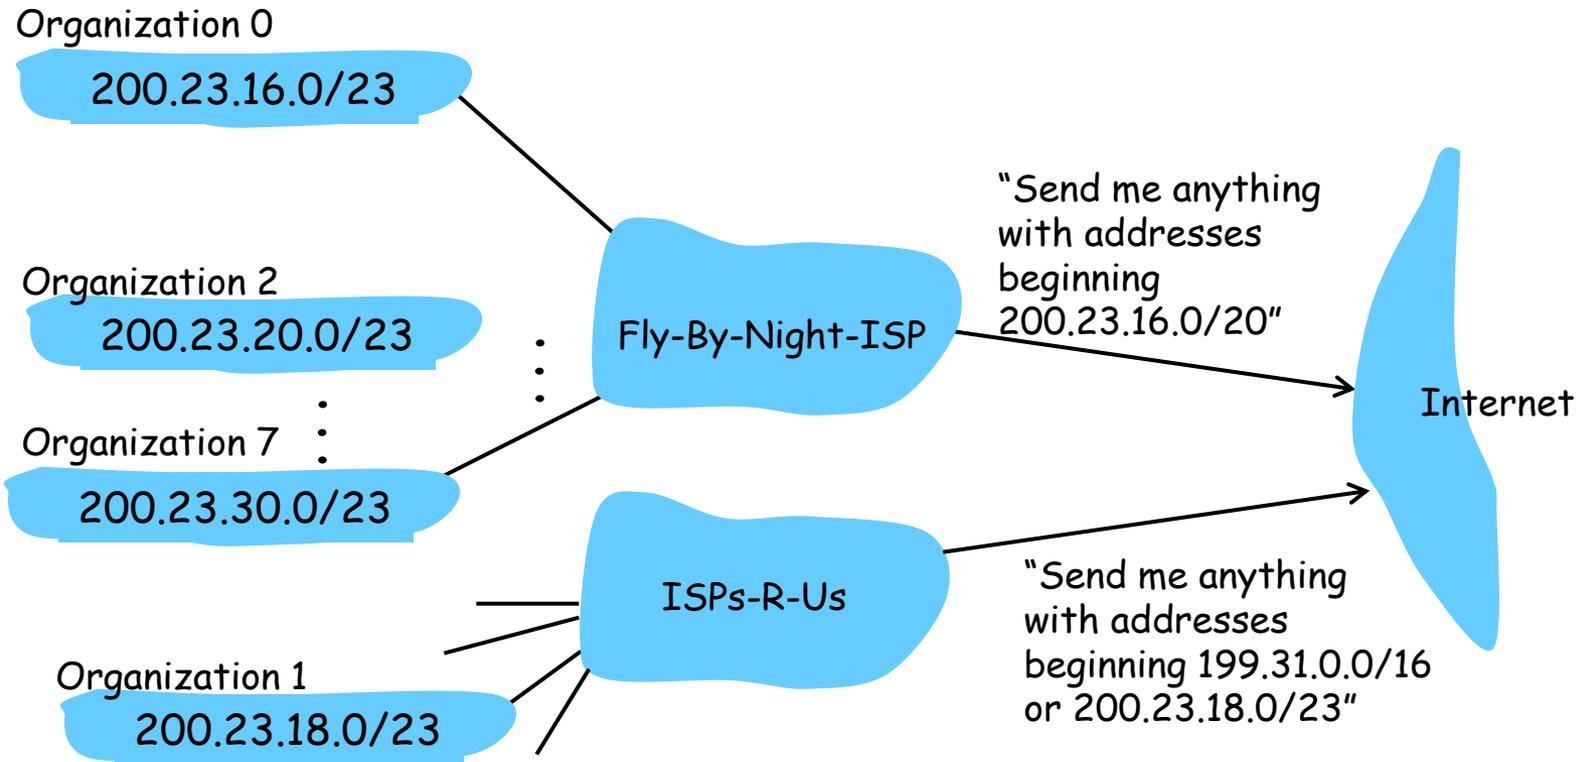

Hierarchical addr: More specific routes

- ❑ Multiple advertised routes could hold destination
 - 200.23.16.0/20
 - 200.23.18.0/23
- both hold 200.23.18.7
- ❑ Always route to *more specific* destination (longest prefix match)

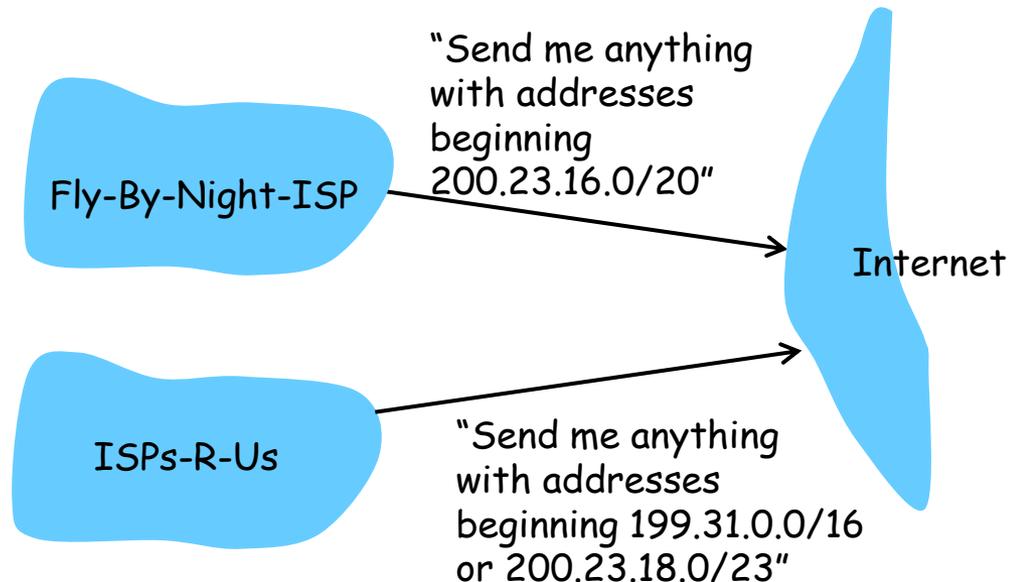

Dealing with scale

Question: what are the *advantages* of large scale?

- ❑ Take advantage of having to do similar things for others (caching)
- ❑ Fault tolerance:
 - Large number of servers
 - We have redundancy; multiple routes between sites
- ❑ Metcalfe's law:
 - "Value" of a network is proportional to square of number of things connected (bigger is better)
- ❑ Law of large numbers
 - Allocation of resources based on average usage rather than peak
- ❑ Amortizing upgrade maintenance over a large population
 - Popular network and services likely to be upgraded/improved
- ❑ Denial of service:
 - Size/replication makes it harder to attack
 - More generally, a system with replicated components is more survivable

Dealing with Scale

Discussion: “For every type of animal there is a most convenient size, and a large change in size inevitably carries with it a change of form.”

Question: True for networks? Why? How so? Examples?

- ❑ Ethernet doesn't scale up: Geographical distance, speed of light delays degrade performance of random access protocols. (geographic scaling). Maybe scale with # users in geographically narrow net if bandwidth scales with users
- ❑ As number of communicants scales, need to change/improve manner in which to access communication channel
 - Example: small number of students, versus 500-class lecture. Keeping bandwidth fixed as # users scales
- ❑ Email versus HTTP
 - Push systems work ok when small number of sender (email)
 - Pull is better with large number of senders (http)

Dealing with Scale

Discussion: “For every type of animal there is a most convenient size, and a large change in size inevitably carries with it a change of form.”

Question: True for networks? Why? How so? Examples?

- ❑ Routing:
 - Large number of users and optimal routes => requires lots of info to compute routes, etc...
 - Doesn't scale
- ❑ Certain services become necessary when you get big
 - Name storage/translation: DNS, phone books
- ❑ A single centralized site eventually breaks
 - Need replication or other form of distribution
- ❑ As network gets bigger flooding breaks
 - Use limited flooding, caching (Gnutella)
- ❑ Switched vs. routed networks
 - Change from layer 2 switched networks to layer 3 routed networks as # users gets bigger